


# WalkLite-LT

Comfort Foam Underlayment - with Self-Sealing Lip and Tape System




Sound Reduction

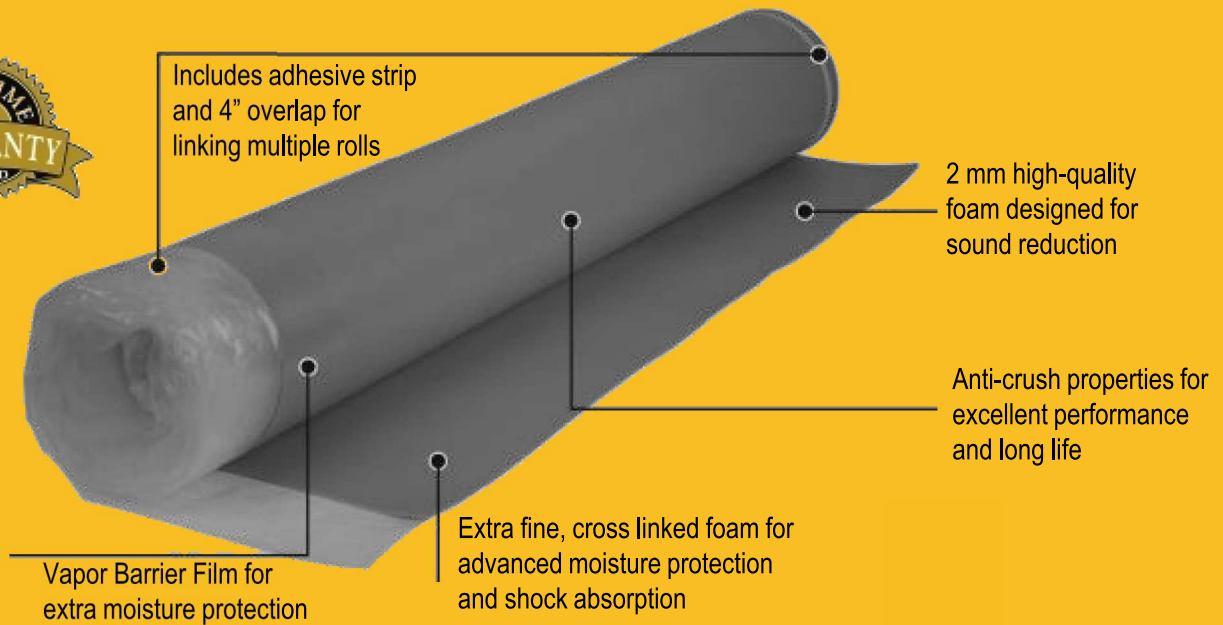


Moisture Protection



Cushions Flooring

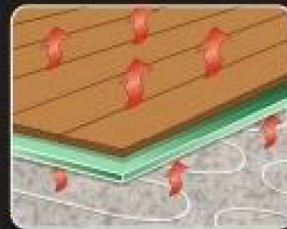

Radiant Heat

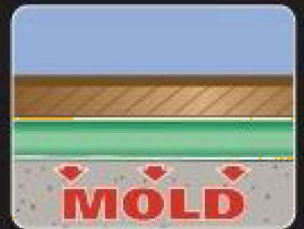

Mold Protection

|                   |                    |
|-------------------|--------------------|
| Coverage:         | 100 sq ft per roll |
| Width of roll:    | 40"                |
| Length of roll:   | 30'                |
| Thickness:        | 2mm                |
| Weight per roll:  | 3.1 lbs            |
| Diameter of roll: | 6.25"              |

## TECHNICAL SPECIFICATIONS

|                                      |    |
|--------------------------------------|----|
| IIC (Impact Sound Transmission Test) | 68 |
| STS (Sound Transmission Loss Test)   | 67 |
| △ (Sound Transmission Lost Test)     | 21 |

Both tests measure sound transference from an upper level room to a lower level room. The IIC measures sound such as moving furniture and walking, while the STC measures sound such as voices and television. Minimum sound rating required by most building codes and architects is 50.

△ Delta Rating is the only true measurement of sound reduction from a product (not floor assembly) in the industry.